

Flange Adaptor ANSI 150


<u>SIZE</u> (mm)	<u>CODE</u>	<u>WORKING PRESSURE</u> kPa (Atmospheric)	<u>MATERIAL</u>
32	FAAN032	1,400	Carbon Steel
40	FAAN040	1,400	Carbon Steel
50	FAAN050	1,400	Carbon Steel
65	FAAN065	1,400	Carbon Steel
80	FAAN080	1,400	Carbon Steel
100	FAAN100	1,400	Carbon Steel
125	FAAN125	1,400	Carbon Steel
150	FAAN150	1,400	Carbon Steel
200	FAAN200	1,400	Carbon Steel
250	FAAN250	1,400	Carbon Steel

*In accordance with AS2129

Flange Dimensions

<u>SIZE</u> (mm)	<u>Number of Holes</u>	<u>Flange Diameter</u> (mm) A	<u>Pitch Circle Diameter</u> (mm) B	<u>Bolt Hole Diameter</u> (mm) C	<u>Flange Thickness</u> (mm) D	<u>End to End</u> (mm) G	<u>Bore Hole</u> (mm)
32	4	117	89	16	16	36	42.6
40	4	127	98	16	16	32	48.7
50	4	152	121	19	16	34	60.7
65	4	178	140	19	16	35	73.4
80	4	191	152	19	16	37	89.3
100	8	229	190	19	18	39	114.7
125	8	254	216	22	19	45	141.7
150	8	279	241	22	22	49	168.7
200	8	343	298	22	22	55	219.5
250	12	406	362	26	24	80	273.5

- CTS Copper Capillary Socket Fittings manufactured in accordance with AS 3688
- Adapters meet requirements of a maximum operating pressure of 1.4MPa where working temperature
- Electrolysis Insulator made from EDPM rubber to prevent contact from Steel Backing Flange and Copper

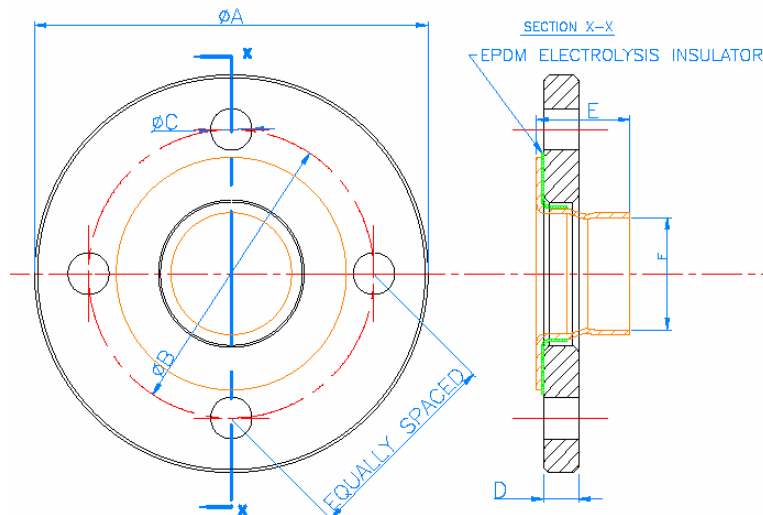

For Commercial, Institutional or Industrial Applications