


Black Steel Blind Flange DIN16

| <u>SIZE</u> (mm) | <u>CODE</u> | <u>WORKING PRESSURE</u> kPa (Atmospheric) | <u>MATERIAL</u> |
|---------------------|-------------|--|-----------------|
| 20 | SDIN16020B | 16,000 | Carbon Steel |
| 25 | SDIN16025B | 16,000 | Carbon Steel |
| 32 | SDIN16032B | 16,000 | Carbon Steel |
| 40 | SDIN16040B | 16,000 | Carbon Steel |
| 50 | SDIN16050B | 16,000 | Carbon Steel |
| 65 | SDIN16065B | 16,000 | Carbon Steel |
| 80 | SDIN16080B | 16,000 | Carbon Steel |
| 100 | SDIN16100B | 16,000 | Carbon Steel |
| 125 | SDIN16125B | 16,000 | Carbon Steel |
| 150 | SDIN16150B | 16,000 | Carbon Steel |
| 200 | SDIN16200B | 16,000 | Carbon Steel |

*In accordance with AS2129

| <u>SIZE</u> (mm) | <u>Number of Holes</u> (mm) | <u>Flange Dimensions</u> | | | | | <u>Face</u> (mm) | <u>Raised Face Diameter</u> (mm) |
|---------------------|--------------------------------|-----------------------------|-----------------------------------|--------------------------------|-------------------------------|------------------|---------------------|-------------------------------------|
| | | <u>Flange Diameter</u> D | <u>Pitch Circle Diameter</u> K | <u>Bolt Hole Diameter</u> L | <u>Flange Thickness</u> C4 | <u>Face</u> F | | |
| 20 | 4 | 105 | 75 | 14 | 16 | 2 | 57 | |
| 25 | 4 | 115 | 85 | 14 | 16 | 2 | 68 | |
| 32 | 4 | 140 | 100 | 18 | 16 | 2 | 78 | |
| 40 | 4 | 150 | 110 | 18 | 16 | 2 | 88 | |
| 50 | 4 | 165 | 125 | 18 | 18 | 2 | 102 | |
| 65 | 4 | 186 | 145 | 18 | 18 | 2 | 122 | |
| 80 | 8 | 201 | 160 | 18 | 18 | 2 | 138 | |
| 100 | 8 | 221 | 180 | 18 | 20 | 2 | 158 | |
| 125 | 8 | 250 | 210 | 18 | 22 | 2 | 188 | |
| 150 | 8 | 285 | 240 | 22 | 22 | 2 | 212 | |
| 200 | 12 | 340 | 295 | 22 | 24 | 2 | 168 | |

- CTS Copper Capillary Socket Fittings manufactured in accordance with AS 3688
- Adapters meet requirements of a maximum operating pressure of 1.4MPa where working temperature
- Electrolysis Insulator made from EDPM rubber to prevent contact from Steel Backing Flange and Copper

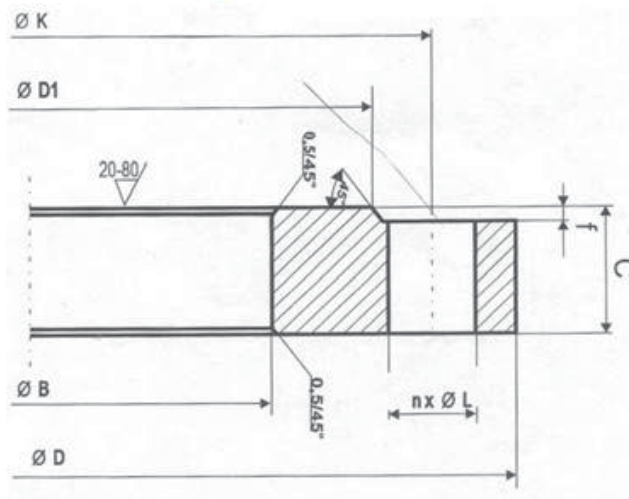

For Commercial, Institutional or Industrial Applications